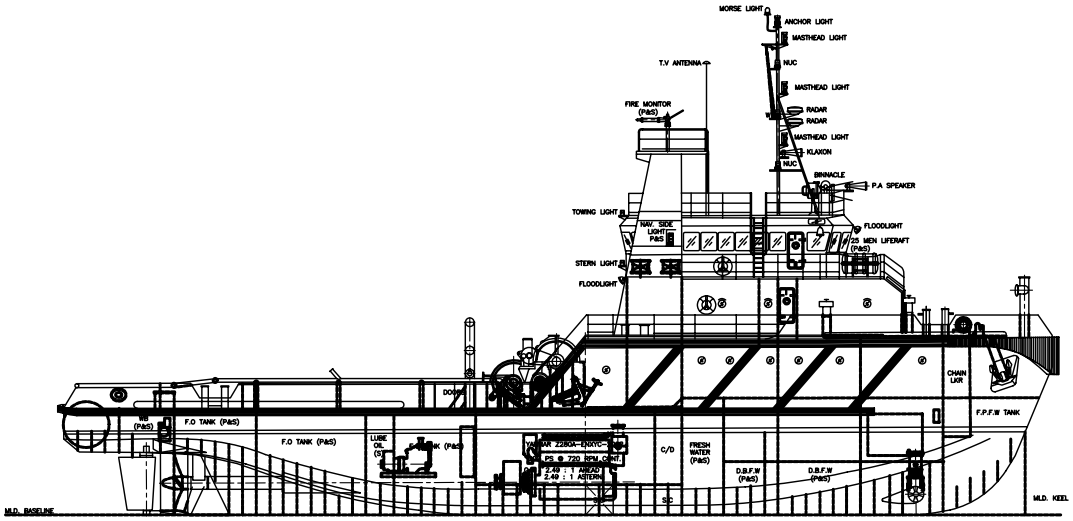

ELEVATION

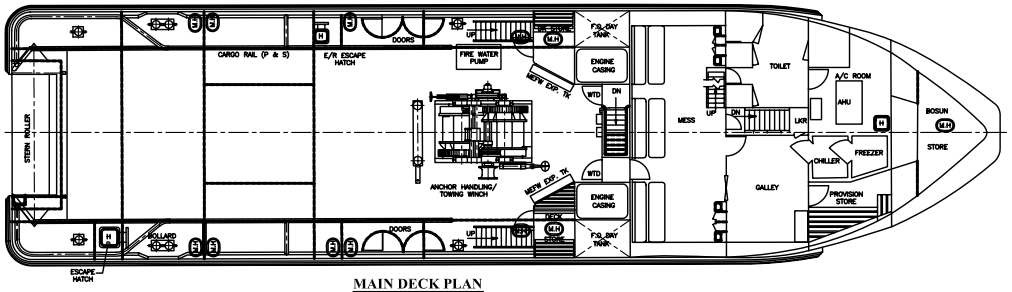

MAIN DECK PLAN

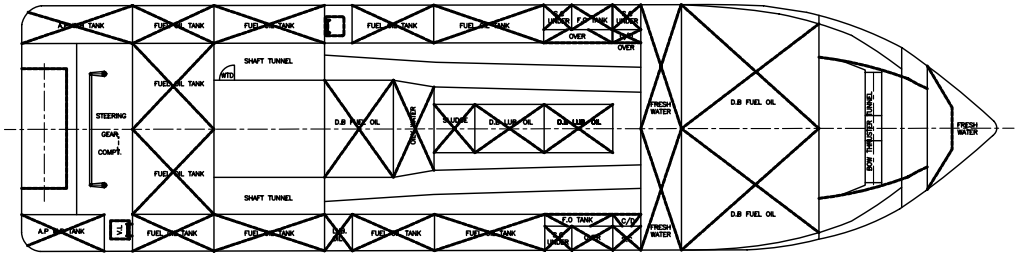

TANK PLAN

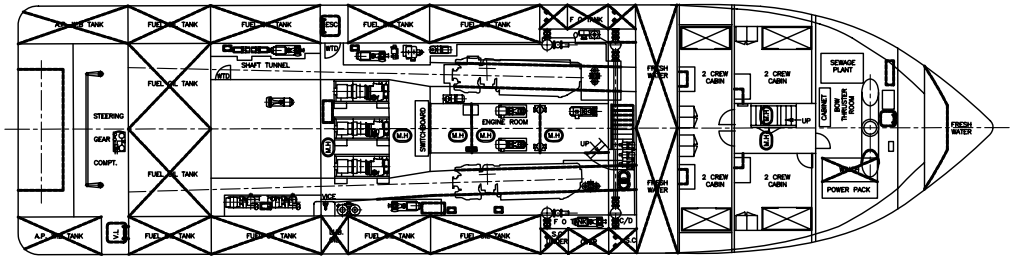

BELOW MAIN DECK PLAN



NAV. BRIDGE DECK PLAN

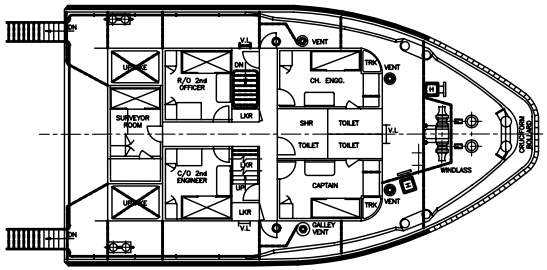

FORECASTLE DECK PLAN



WHEEL HOUSE TOP



FIRE MONITOR PLATFORM

PRINCIPAL DIMENSIONS

LENGTH O.A. (MLD. HULL)	-	39.60 M
LENGTH W.L.	-	38.50 M
LENGTH B.P.	-	35.20 M
BEAM MLD.	-	10.00 M
DEPTH MLD.	-	4.20 M
AVERAGE OPERATING DRAFT	-	3.20 M
MAXIMUM OPERATING DRAFT	-	3.60 M
GROSS TONNAGE	-	494 TONS
NETT TONNAGE	-	148 TONS
COMPLEMENT	-	16 MEN
MAIN ENGINES	-	2 x 2000 HP @ 720 RPM.
CLASSIFICATION:	-	ABS + A1 + AMS (TUG)

NOTES:

1. ALL DIMENSIONS ARE IN M. UNLESS OTHERWISE SPECIFIED.

REFERENCE DRAWINGS

DRAWING No.	DESCRIPTION	REV.
630-1AF	GENERAL ARRANGEMENT (39M. TWIN SCREW SUPPLY/ANCHOR HANDLING TUG.)	-

REV	DATE	DESCRIPTION	BY	CH'K	RV'D	AP'D
00	23/10/07	ISSUED FOR REVIEW/APPROVAL	TKK	SBM	KGS	KGS

SCALE: N.T.S | SIZE: A1 | DRAWN: TKK | CHECKED: EKC

CLIENT: ---

PMC: ---

VALENTINE MARITIME (GULF) L.L.C.
ABU-DHABI, U.A.E.

TITLE:
VALENTINE-II
GENERAL ARRANGEMENT

JOB No.	DRAWING No.	SHEET No.	REV.
-	VAL2-GEN-GA-002	1 of 1	00

F:\VAL2\GENGA00200